


C2C-15HS-POE

IP66
EN 60529

Ω
8 Ohms



IP PA HORN SPEAKER

Click2Connect Outdoor Weather proof IP Horn Speaker is a steadfast and high endurance SIP enabled speaker that can be used for multiple applications such as broadcasting prerecorded messages, important notifications and alerts, scheduled announcements, SIP paging, streaming high-def playback music etc. Our range of IP Speakers is a real innovation in design and performance. These exceptional speakers are both stylish and elegant and offer a cost effective and robust solution.

Application Scenarios



Park



Campus



Shopping Centers



Train/Bus Stations



Airports



Schools



Residential Buildings



Retail Shops



Restaurants



Office Buildings



Warehouses



Hotels



Features



Reliable IP66 Cabinet
IP Speaker with
Crystal clear HD Sound
Clarity



Standard PoE
(IEEE 802.3at)
Support



Quick and Easy
Installation on Single
Network Cable



Built in
Class D
Amplifier



Self Test Function
for
Device Status



Master report
function
(*Excel, Pdf)



Remotely speaker
firmware upgradation
through
Click2Connect Server



Remote Health
Status of
Speaker



Remotely Volume
Control



Any IP Camera
Can integrate
and
Bind with Speakers



Easy
integration with
any VMS



E-Mail
and SMS
alerts




Schematic Diagram

Click2Connect
IP Audio Gateway Embedded with Software


Click2Connect MOBILE & Desktop APP

Wall Mount IP Speakers




Switch


IP Ceiling Speakers



IP Horn speakers

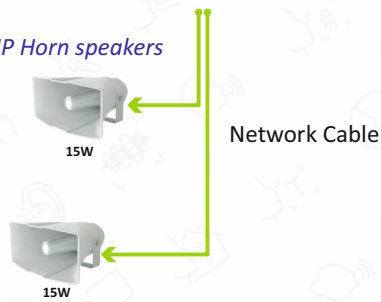

IP Horn speakers

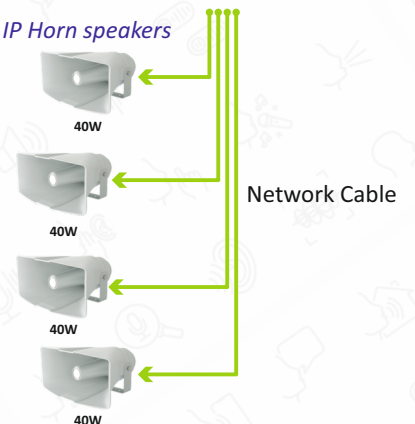

Specifications:

Speaker	
Input Power	15W RMS/23W Max.
SPL at 1 kHz (1W/1m)	8Ω
Amplifier:	Built-in Class D Amplifier
Freq. Response	275-7,000Hz
SPL at 1kHz	106dB/1W/1m 118dB/15W/1m
Dimensions	253 x152 (L284) mm
Audio	
Audio codecs:	G.722, G.711 A-law, G.711 U-law, Opus
Audio streaming:	MP3 sampling rate 8 – 48KHz, bit rate 64 – 320kbps, mono or Stereo
Network	
Interface:	RJ45 10/100
Protocols:	SIP(RFC3261), HTTP, TCP/IP, SSL, DNS, SNTP, NTP, RTSP, RTP, RTCP, TCP, UDP, MQTT, ICMP, DHCP, ARP, SSH
Administration	
Configuration:	By Click2Connect Server
Environmental	
Installation environment:	Indoor/Outdoor
Operating temperature:	-10°C - 70°C
Connection Diagram	

